


S E R I E S



102HA & 102HS

ROTARY INCREMENTAL SHAFT ENCODER

The 102HA & 102HS Series are precision, yet versatile hollow shaft encoders designed for very harsh environments, such as open ship deck applications etc., and is capable of 30mm bore diameter. The HA Version is machined from Anodized Aluminium (with a Powder Coated Cover), whereas the HS version is machined from solid 316 Stainless Steel. It is simply mounted by affixing a fixed pin into one or more of the holes on its front face, simply to stop it from rotating.

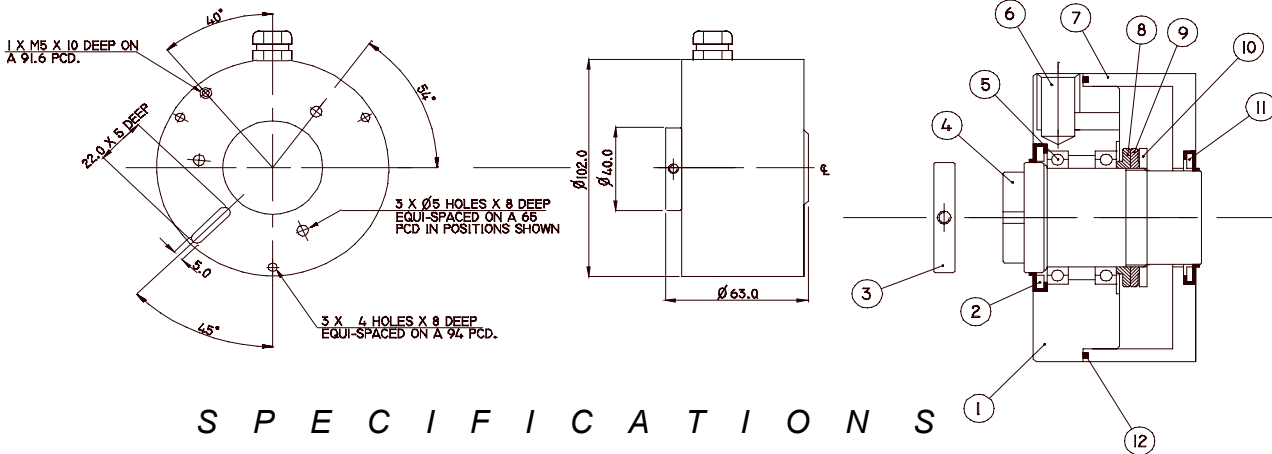

S P E C I F I C A T I O N S

Body & Cover:

102HA: Aluminium
(Body: Hard Anodised)
(Cover: Powder Coated)
102HS
Stainless Steel (316)

Shaft:

Stainless Steel

Bearings

Ballraces

Shaft Sealing:

Front: Sealed bearing +
Single lip seal
Rear: Single lip seal on
rear of cover

Protection:

IP66 / IP67

Operating Temp:

-20 to +60°C
(higher on request)

Maximum Speed:

3000 RPM

Torque:

Less than 5Ncm (typical)

Inertia:

750gcm² (typical)

Shaft Loading:

Designed to support its own
weight

Cable:

Screened, oil and salt water
proof

Impulse Frequency:

Up to 300KHz
(depending on model)

Current Consumption:

60mA
(typical - without load)

S T A N D A R D R E S O L U T I O N S

1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45,46,
47,48,49,50,51,52,53,54,55,56,57,58,59,60,61,62,63,64,65,66,67,68,69,70,71,72,73,74,75,76,77,78,79,80,81,82,83,84,85,86,87,88,
89,90,91,92,93,94,95,96,97,98,99,100,101,102,103,104,105,106,107,108,109,110,111,112,113,114,115,116,117,118,119,120,121,
122,123,124,125,126,127,128,129,130,131,132,133,134,135,136,137,138,139,140,141,142,143,144,145,146,147,148,149,150,151,
152,153,154,155,156,158,159,160,161,162,163,164,165,166,167,168,169,170,171,172,173,174,175,176,177,178,179,180,181,182,
183,184,185,186,187,188,189,190,191,192,193,194,195,196,197,198,199,200,201,202,203,204,205,206,207,208,209,210,211,212,
213,214,215,216,217,218,219,220,221,222,223,224,225,226,227,228,229,230,231,232,233,234,235,236,237,238,239,240,241,242,
243,244,245,246,247,248,249,250,251,252,253,254,255,256,257,258,259,260,261,262,263,264,265,266,267,268,269,270,271,272,
273,274,275,276,277,278,279,280,281,282,283,284,285,286,287,288,289,290,291,292,293,294,295,296,297,298,299,300,301,302,
303,304,305,306,307,308,309,310,311,312,313,314,315,316,317,318,319,320,321,322,323,324,325,326,327,328,329,330,331,332,333,334,335,336,337,338,339,340,341,342,343,344,345,346,347,348,349,350,351,352,353,354,355,356,357,358,359,360,361,362,363,364,365,366,367,368,369,370,371,372,373,374,375,376,377,378,379,380,381,382,383,384,385,386,387,388,389,390,391,392,393,394,395,
936,937,938,939,940,941,942,943,944,945,946,947,948,949,950,951,952,953,954,955,956,957,958,959,960,961,962,963,964,965,
966,967,968,969,970,971,972,973,974,975,976,977,978,979,980,981,982,983,984,985,986,987,988,989 through to 5000



CONNECTIONS

FUNCTION CABLE PLUG

0 Volts	Black	Pin 1
+ Volts	Red	Pin 2
A Channel	White	Pin 3
B Channel	Blue	Pin 4
Z Channel	Yellow	Pin 5
\bar{A} Channel	Green	Pin 6
\bar{B} Channel	Violet	Pin 7
\bar{Z} Channel	Brown	Pin 8

ACCESSORIES AVAILABLE

~COUPLINGS

~BRACKETS & FLANGES

~MEASURING WHEELS

STANDARD FEATURES

- IP66/IP67 Protection
- Automatic Calibration
- Short - Circuit & Overload Protection
- UK Manufactured
- High Noise Immunity
- Robust Construction
- Suitable for Very Harsh Environments
- Fast Delivery
- 3 YEAR WARRANTY

STANDARD ORDERING CODES

