



Industrial Encoders
Direct Ltd

51HA Series

Ultra-Versatile Hollow Shaft Encoder




Features

- Very Slim Profile
- 100 Degrees C Operation (-40°C Available)
- Opto-ASIC Technology
- Many Resolutions Available
- Up to 15mm bore (Metric) & up to 5/8" (Imperial)

Resolutions

- 1
- 10
- 11
- 12
- 20
- 25
- 30
- 40
- 60
- 100
- 120
- 128
- 200
- 250
- 254
- 256
- 300
- 360
- 400
- 500
- 512
- 600
- 720
- 800
- 840
- 1000
- 1024
- 1200
- 1220
- 1250
- 1270
- 1800
- 2000
- 2048
- 2500
- 2540
- 3000
- 4096
- 5000
- 8192
- 10000

COMMON APPLICATIONS: Motor Feedback - Velocity & Position Control etc.

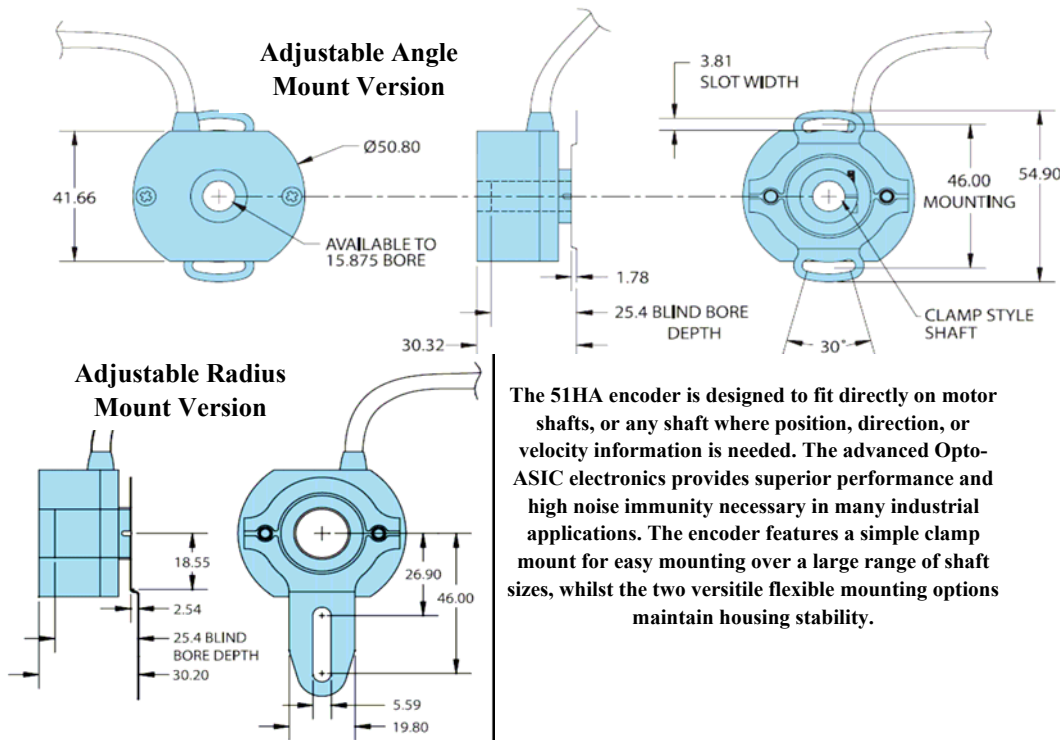

SPECIFICATIONS

Body:

Precision Machined
Aluminium (Anodized)

Cover:

Precision Machined
Aluminium
(Powder Coated)

Shaft:

Stainless Steel

Bearings:

Sealed Ball Race

Cable: Screened

Protection:

IP64

User Shaft Allowable Runout:

0.2mm Total Indicated Reading (TIR)
0.75mm Allowable End Play (Maximum)

Operating Temperature:

0 to +100°C

(-40°C to +70°C Optional)

Storage Temperature:

-40 to +100°C

Maximum Speed:

7500 RPM

Vibration:

10g @ 58 to 500Hz

Shock:

50g @ 11ms duration

Humidity:

98% RH (non-condensing)

Shaft Loading:

Flexible Mount (as supplied)

Cable:

Screened, oil and salt water proof

Impulse Frequency:

200KHz (Max)

Current Consumption:

100mA (Maximum - without load)

Noise Immunity:

BS EN61000-6-2; BS EN50081-2; BS
EN61000-4-2; BS EN61000-4-3; BS
EN61000-4-6; BS EN55011

TEL: (UK) +44 (0) 1978 664722

FAX: (UK) +44 1978 664733

WEB: www.industrialencodersdirect.co.uk

EMAIL: sales@industrialencodersdirect.co.uk

